

# PRO RIDE SWITCHBACK SADDLE BAG KIT P/N 2878720



**POLARIS**  
The Way Out.®

## Application

All MY12 Pro-Ride Switchback Models

Before you begin, read these instructions twice and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.

## This kit includes:

Qty	Part Description	Part Number
1.....	Saddle bag LH	2684843
1.....	Saddlebag RH	2684844
2.....	Saddlebag liner	2685061
1.....	Instructions	9923600

## No Tools Required to Install this Kit


**IMPORTANT:** For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence as shown on the attached instructions.

## ⚠ WARNING


Make certain the Lock and Ride anchors are fully seated in the receptacle and fully locked. There is a risk of the saddle bags falling off the vehicle if the anchors are not locked.

## INSTALLATION INSTRUCTIONS



1. Align front upper saddle bag latch with the front upper mounting hole on the rack assembly. Figure 1.

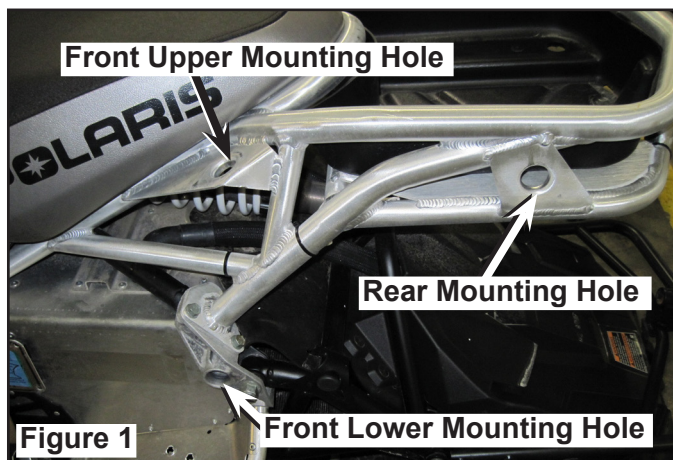


2. Rotate bag slightly inward and engage the saddle bag hanger onto the rack tube. Figure 2.

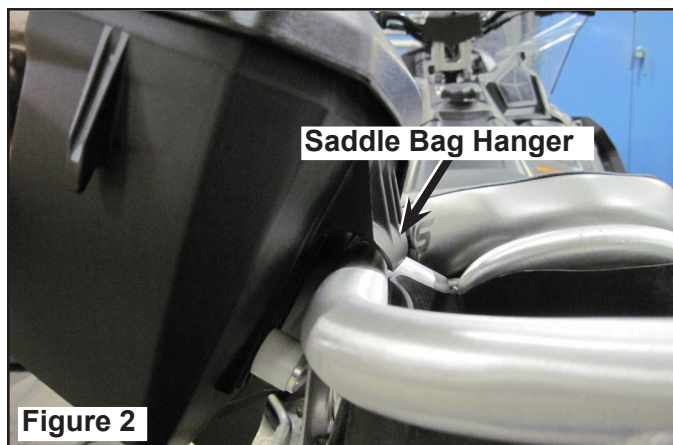

3. Rotate the bag downward and in with light pressure until the lower front and rear latches engage the lower front and rear mounting holes. Figures 3a and 3b.

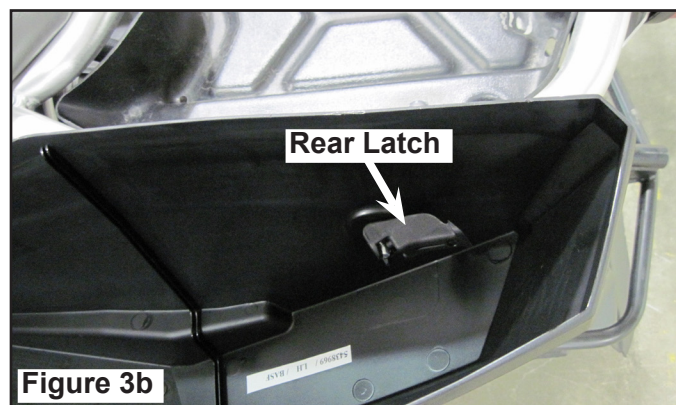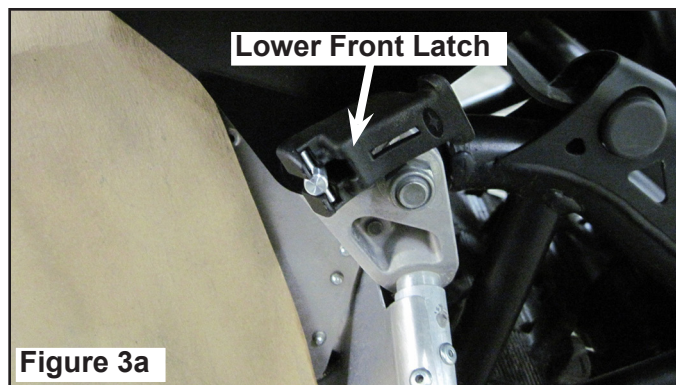

4. Lock the latches in place by pushing downward on the cam over lever until it snaps in place. **NOTE:** The Polaris star emblem must face out to be latched properly. Figure 4.
5. Install the saddle bag liners by setting them in place so the handle is located closest to the rack. The liners are symmetrical so they fit either side. Make sure the handle and zipper pulls are tucked inside the walls of the saddle bag prior to closing the lid.

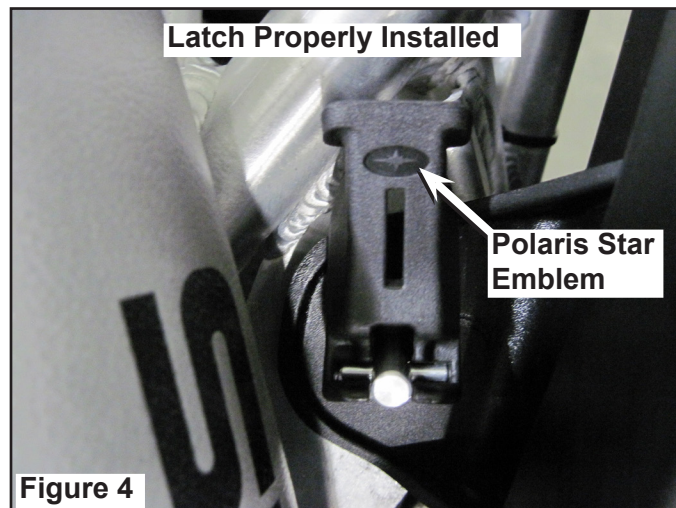

6. Close the cover and hook the two rubber straps to secure the lid. Figure 5.
7. Repeat Steps 1–5 for installation of the opposite side.

